


# DESIGN & INTEGRATION

Phone 905-669-8497 • Fax: 905-669-3607

E-mail: Sales@designintegration.com

## LIQUID LAMINATION LINE

### Load/Unload Conveyor

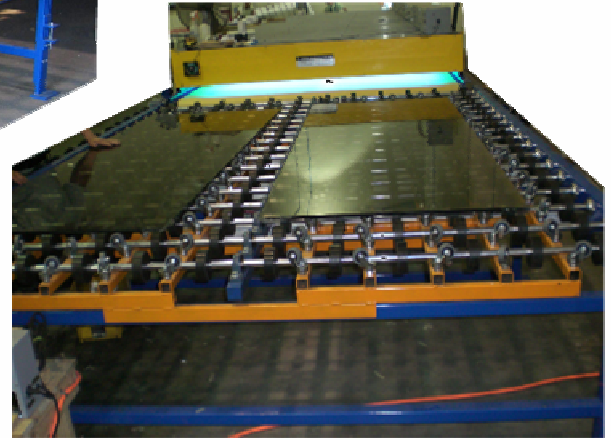

### System Specifications:

- 84" x 120"
- Solid Construction
  - o Pop-up frames made from Tubular steel
  - o Can support approximately 4000LB
- Non Marking rollers
  - o 4" OD x 1 1/4" 'Donuts' spaced at 8" centers
- Euro drive Gear Unit
- Adjustable Line Speed
- PLC Controlled
- Each roller is chain driven
- Pop-up frame for easy loading
  - o Non marking casters at 8" centers
  - o Sturdy, the frame is stable even if the load is only on one corner
- Side Roller on out feed model for easy unloading.

### Requirements:

120V, 60/80 PSI air

Floor Space: 100" x 124"

### Ordering Information

Reference Model: 06-1512-Load/unload

Delivery: 10-12 Weeks

WWW.GLASSMACHINE.CA